

PRODUCT TECHNICAL DATASHEET


R20/300



CODE	DESCRIPTION	PCS/PALLET
R20/300	Electromechanical actuator 230V AC, irreversible, for swing gate with leaf up to 2,5 m with 1 microswitch limit switch in opening. Complete with short brackets to weld on.	50


PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	40%
Thrust	2500N
Operating temperature	-20+55 C°
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time	19 s
Stroke	320 mm
Motor thermal protection	150 C°
Incorporated condenser	15 µF
Limit switch	Microswitch in opening (optional in closing MC770)
Encoder	-
Maximum dimension product in mm (L x W x H)	858,5 x 120 x 165
Product weight packed (Kg)	9,2
Number items per pallet/box	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

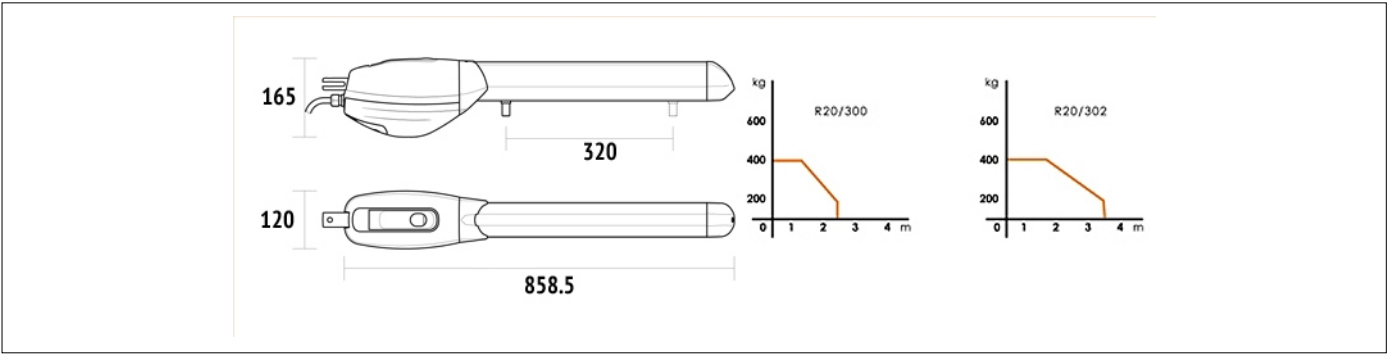

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

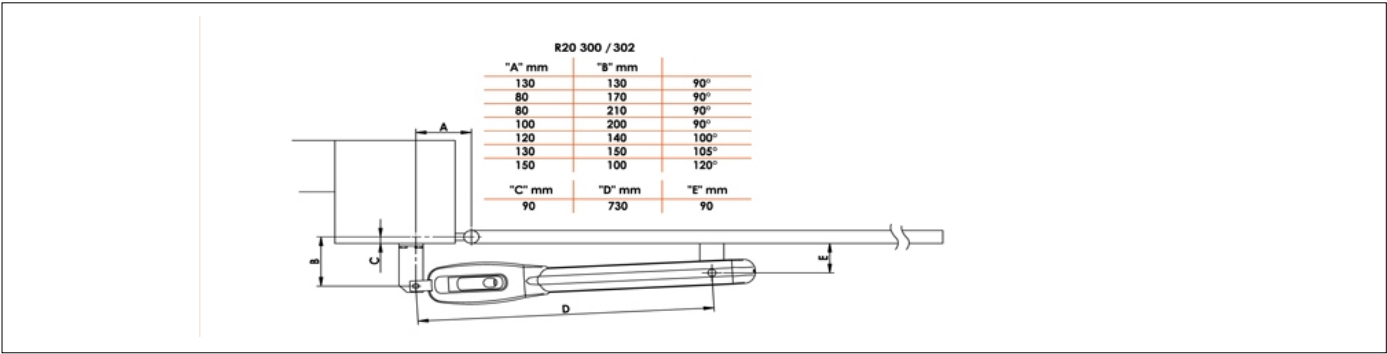

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



MC770
Kit optional microswitch in closing with cable series R20.



MC780
Kit 2 EXTRA mechanical stops for R20 series.



KT206/R
Kit short adjustable rear bracket to screw on and short welded front bracket to screw on.