



Automations for swing gates

Electromechanical actuator BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 7 mt lenght, with mechanical stopper in opening and closing.

TECHNICAL IMAGE



Code	Description	Pcs/pallet
SMARTY7	Electromechanical actuator BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 7 mt lenght, with mechanical stopper in opening and closing.	36


Product technical specifications	SMARTY7
Number items per pallet	36
Power	36V
Power rating	200W
Max thrust	600 - 5000N
Frequency of use	Intensive use
Operating temperature	-20 C° +55 C°
Protection level	IP 44
Stroke	max 520 mm
Manoeuvre speed	1,66 - 1 cm/s
Opening time at 90°	35-50 s
Maximum dimension product in mm	L1312 x W166 x 137H
Operating cycles per day (opening/closing - 24 hours no stop)	1000 cycles
Limit switch	Mechanical stopper in opening and closing
Always included in the individual product package or kit:	Kit 3 hinge plates short, to weld.(KT238), 2 mechanical stop (MC782).
Reductor Type	Irreversible

PACKAGING INFORMATION




Size in Cm: Lenght: 132 - Widht.:123 - Heigth: 147

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

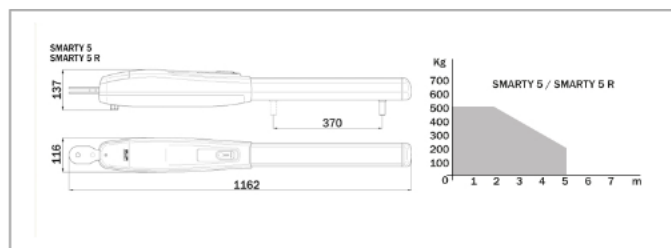

DIMENSIONS

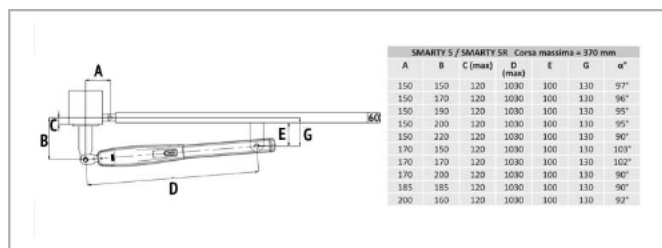

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



RL669
Kit for release from
outside without
handle for series
SMARTY.



RL670
European cylinder
key for release
system series
SMARTY.

